
JEC - Always a Step Ahead

JRZP SERIES CIRCUMFERENTIAL PISTON PUMPS







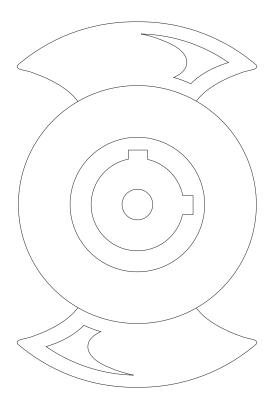

High Pride Higher Performance The Highest Quality












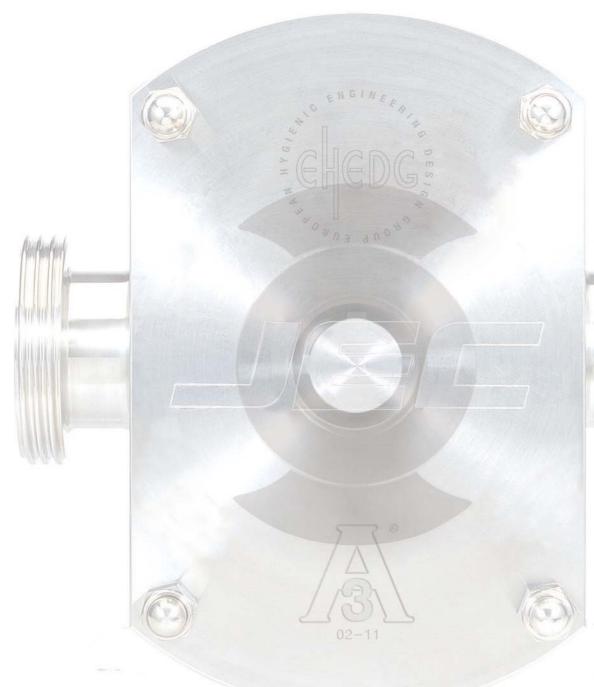

JEC Ltd. specialise in the field of sanitary pumps.

JEC was established in 1990 and started producing sanitary pumps utilising precision cast and pressed parts for the first time in Korea. Since then JEC has been successfully supplying to the process industries centrifugal, rotary, twin screw and self-priming pumps, as well as blenders. JEC pumps are now renowned for reliability both for general duties and special application. JEC's success is built upon high quality manufacture and customer satisfaction Our policy is one of long term vendor partnerships.

Good relations with our customers are prerequisite our growth.

JEC considers exchanging ideas their customers of the highest importance.

It is our belief JEC fully supports to meet customer's expectations and contributs towards their prosperity.

We are always striving to make every effort to start new initiates.

The JEC philosophy is one of continuous improvement and keeping promises.





JRZP series Circumferential Piston Pumps

JEC - Always a Step Ahead

- The revolutionary, EHEDG (European Hygienic Engineering & Design Group) and 3-A certified. It is the most reliable CP pumps in the world for CIP capability.
- Unique Front-Loading product seal positioning gives faster maintenance, easier cleaning, and less downtime.
 By removing only the front cover, both rotor and product seal can be fully accessed from the front of the pump without disconnecting the process line. The world first Front Loading Seal for CP pumps became in JEC by JRZP series.
- Alternatively, a simple O-ring or PTFE Triple Lip-seal can be supplied offering easy to change with low service cost.
 All seal options listed fit into the same rotor case giving cost-effective changeability, even after the pump has been installed.
- Many applications require the pump head to be heated or cooled to assist in pumping the product, this is simple with the JEC JRZP seires pump which can be with rotor case thermal jackets or front cover thermal jacket as required.
- To handle abrasive products, pump product internals can also be hardened.
- A high grade 0.6 \(\mu\)mRa surface finish of the 316L stainless steel pump head components is provided as standard. The 0.4 \(\mu\)mRa Surface finish can be provided optionally.


STANDARD DESIGN

- JEC JRZP series pumps have three kinds of gear boxes with four kinds of rotor housings and lobe rotor.
- JEC JRZP series pumps are normally fitted with horizontal ports but simply are fitted with vertical ports.
- A single seal can be easily modified to a double seal with a minimum of additional parts required due to its unique modular design.
- Complete connections according to optional standard Clamp, IDF male, DIN, BS, SMS male and Flange.
- The designed Bi-wing rotor geometry is maintained throughout the JRZP range of pumps giving high performance and key benefit of CP pumps.

APPLICATION

- JEC JRZP series pumps have been designed to suit all hygienic pumping applications found in the food, dairy, beverage, pharmaceutical and other place where stainless steel is resistant to the liquids to be pumped
- Both thin and viscous liquids up to 1,000,000 centipoise can be handled with a self-priming capability up to 4m, capacity range up to $42\,\mathrm{m}$ /hr and head up to 150m.

PERFORMANCE CURVE

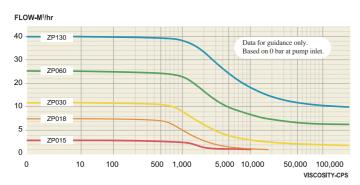

SPECIFICATIONS


Model No.		Displacement		Stand Connect	dard ion Size	M Differentia	Max. Speed				
	Liters/rev	Int Gal/100rev	US Gal/100rev	mm	mm Inches E		PSI	Rev/min			
ZP015-0063-15	0.063	1.38	1.66	38	1.5	15	217	800			
ZP018	Please consult to JEC.										
ZP030-026-10	0.26	5.71	6.86	50	2	10	145	700			
ZP060-074-15	0.74	16.27	19.54	63	2.5	15	217	600			
ZP130-118-08	1.18	25.95	31.17	76	3	8	116	600			

"The higher the precision the longer the span of product life"




The world first Front Loading Seal System


SEAL OPTIONS




Single Mechanical Seal



Double Mechanical Seal



Double O-ring Seal



Lip Seal















"The reliable choice for your process"









■ OUTLINE DIMENSION

Model NO. ports	ports	Dimension															
	Α	В	С	D	E	F	G	Н	J	K	L	М	N	Х	Υ	Z	
JRZP015-0063-15	1.5"	281	152	222	228	105	84	134	39	55	141	77	109	22	34	8	9
JRZP018		Please consult to JEC.															
JRZP030-026-10	2"	372	188	264.5	305	129	132	180	44	60	185	101	143	32	52	10	12
JRZP060-074-15	2.5"	471	242	347.5	380	158	160	242	67	68	243.5	128.5	186	45	57	14	13
JRZP130-118-08	3"	497	242	347.5	393	158	160	242	80	68	243.5	128.5	186	45	57	14	13




■ PORT SIZE & WEIGHT

MadalNO				Weight	Volume								
Model NO.	ports	CLAMP	IDF	DIN	BS	SMS	FLANGE	KG	СВМ				
JRZP015-0063-15	1.5"	20	25	30	26	20	30	21	0.01				
JRZP018			Please consult to JEC.										
JRZP030-026-10	2"	22	27	30	26	22	30	41	0.03				
JRZP060-074-15	2.5"	26	26	37	26	26	35	85	0.05				
JRZP130-118-08	3"	28	28	42	26	28	40	97	0.06				













A **VERDER** COMPANY

15-26, Beodeul-ro 1362, Paltan-myun, Hwaseong-si, Gyeonggi-do, 18578, Rep. of Korea Tel:+82-31-355-0316, Fax:+82-31-355-0319, www.jecpump.com, E-mail:jec@jecpump.com